



HARDY

Angel² Reel Series



BY APPOINTMENT TO HRH
THE PRINCE OF WALES
MANUFACTURERS OF
FISHING TACKLE
Hardy & Greys Limited, England

This reel has been made by craftsmen using the best materials available to ensure its reliability. Its high quality components are precision machined with the absolute minimum susceptibility to wear or the need for future readjustment.


Given care and periodic cleaning, your reel will be a faithful servant and give you years of superb performance.

Hardy & Greys Limited, Willowburn, Alnwick,
Northumberland, NE66 2PF, England
Tel +44 (0)1665 602771 Fax +44 (0)1665 602389
www.hardyfishing.com sales@hardyfishing.com

Care and maintenance

The same method of cleaning is valid for all reels in the freshwater Angel² Reel range.

1. Remove line and backing.
2. Remove the spool.
3. Flush away dirt by placing the spool and frame under a stream of warm water.
4. Dry carefully with a lint free cloth.
5. Lubricate with a good quality oil at the points illustrated on the diagrams.
6. Always ensure the spindle head is adequately greased.
7. Always turn the disc drag to the minimum setting to avoid compression of the spring.
8. Always ensure the reel and line are dry before storing in the case or pouch.

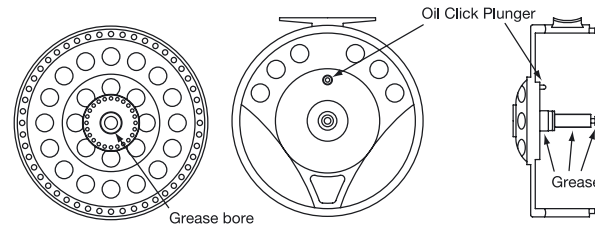


Changing your reel from left to right hand wind

All Angel² reels are designed to work in right or left hand wind. When you receive your reel it will be set for left hand wind.

To convert your reel to right hand wind:

1. Remove the spool out of the frame.
2. Turn the spool over so that the clutch retaining nut is visible.
3. Using your thumb and forefinger, remove the retaining nut by turning anti-clockwise.
4. The one-way clutch holder is now visible, remove this from the drum by rotating the drum 180° degrees and replace it back in the spool housing. The end of the clutch unit with the stainless steel showing should now be upright and visible.
5. Using your thumb and forefinger, replace the retaining nut by turning clockwise.
7. Replace the spool into the frame – your reel should now be right hand wind.

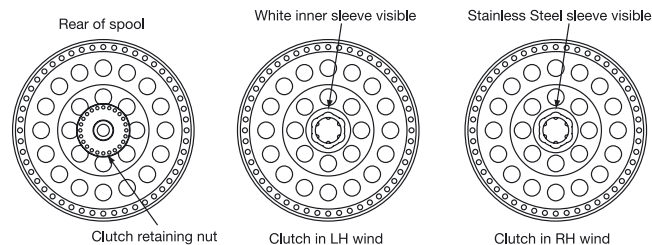

Angel² disc drag

The disc drag mechanism can be adjusted by simply turning the regulator button on the face of the frame, clockwise to increase the drag, anti-clockwise to decrease the drag. When the reel is not in use, the drag should be turned to the minimum setting.

Lifetime original user warranty

All Hardy Angel² reels carry an original owner lifetime warranty against any defect in workmanship or materials. Should there be any defect, Hardy & Greys Ltd. will, at its option, repair or replace the item. This warranty does not cover damage caused by misuse, lack of maintenance, negligence or normal wear and tear. Warranty claims with the proof of purchase should be sent to:

Customer Service Department
Hardy & Greys Limited
Willowburn
Alnwick
Northumberland
NE66 2PF
England

Tel +44 (0)1665 602771
Fax +44 (0)1665 602389

www.hardyfishing.com
sales@hardyfishing.com